



REV.	ECO#	DATE	REVISION RECORD	DWG BY	APPR BY
1	040509	6/07/04	ORIGINAL SUBMITTAL	JGO	MS
2	040605	8/19/04	ADDED CFX5-7	JGO	MS
3	051028	10/17/05	ADDED CFX2-5N	LEK	EA
4	060104	10/17/05	ADDED CFX2.5MM-4MM; 4MM-6MM	LEK	EA
5	070867	12/24/05	CHANGE DRAWING FORMAT	JEFFS	
6					

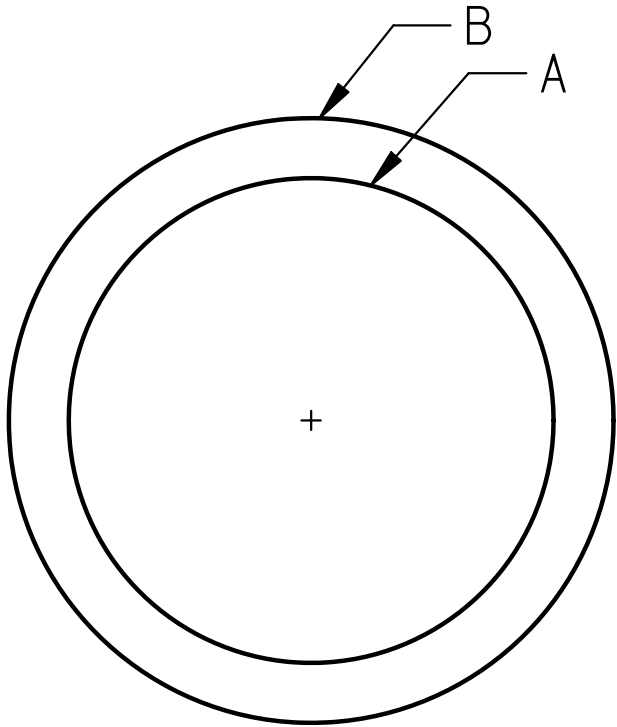

PART #	NOMINAL ID	ACTUAL ID	NOMINAL OD	ACTUAL OD	NOMINAL WALL
	DIMENSION A		DIMENSION B		
CFX2.5MMX4MM	(3/31")	.098 \pm .005	(5/32")	.157 \pm .005	(1/34")
CFX2-4	(1/8")	.125 \pm .005	(1/4")	.250 \pm .005	(1/16")
CFX170-4	(11/65")	.170 \pm .005	(1/4")	.250 \pm .005	(1/25")
CFX3-4	(3/16")	.187 \pm .005	(1/4")	.250 \pm .005	(1/32")
CFX3-5	(3/16")	.187 \pm .005	(5/16")	.312 \pm .005	(1/16")
CFX2-5	(1/8")	.125 \pm .005	(5/16")	.312 \pm .005	(3/32")
CFX4-6	(1/4")	.265 \pm .005	(3/8")	.375 \pm .005	(1/16")
CFX4MMX6MM	(5/32")	.157 \pm .005	(15/64")	.236 \pm .005	(1/25")
CFX5-7	(5/16")	.323 \pm .008	(7/16")	.438 \pm .008	(1/16")
CFX6-8	(3/8")	.385 \pm .008	(1/2")	.500 \pm .008	(1/16")
CFX8-10	(1/2")	.510 \pm .010	(5/8")	.625 \pm .010	(1/16")

NOTES:

1. HARDNESS - 92 Shore A - per ASTM D2240
2. MINIMUM TEMP -40 F ~ -40 C - per ASTM D1349-09
3. MAXIMUM TEMP +170 F ~ 76 C - per ASTM D1349-09
4. STERILIZATION METHOD - E-BEAM, GAMMA 25 kGy
5. COMPRESSION FITTING COMPATIBLE

		Eldon James Corp. 626 West 66th Street, Loveland, CO 80538 Phone: 970-667-2728 Fax: 970-667-3204 www.eldonjames.com			
		FLEXELENE CFX TUBING			
DRAWN BY JGO	DATE PART CREATED 6/07/04	APPROVED BY MS	APPROVAL DATE 6/07/04	DRAWING NAME CFX QC	
DRAWING SCALE NTS	SHEET SIZE A	SHEET 1 OF 1	TITLE BLOCK REVISION A		
ALL PRINTED COPIES OF THIS DRAWING ARE FOR REFERENCE ONLY				PART NO. SEE CHART	REV. 5